

说明

该基于处理器的参考设计有助于加快产品上市步伐，并帮助客户设计具有成本效益的智能恒温器人机界面 (HMI) 解决方案。AM335x 系列处理器提供具有 300MHz 至 1GHz 频率、图形加速功能和软件的可扩展替代产品，以满足低端至高端应用的需求，并提供充足的连接以及智能恒温器 HMI 所需的关键外设（如通用异步接收器/发送器 (UART)、SDIO、USB 等）。

该智能恒温器 HMI 参考设计展示了二维 (2D) Qt 图形用户界面 (GUI) 以及用于硬件加速渲染图形的 TI 处理器功能。

资源

TIDEP-01005

AM335x

AM335x 入门套件

AM335x 处理器 SDK

设计文件夹

产品文件夹

工具文件夹

软件文件夹

特性


- 演示使用硬件加速图形和 Qt 的智能恒温器
- 支持电阻式或电容式触摸屏
- 在提供的 4.3 英寸 LCD 上采用 480 × 272 的分辨率；在其他显示器上最高可扩展至 2048 × 2048
- 在 TI 的处理器 SDK-Linux 上构建以便于扩展到其他平台 Sitara™ 处理器

应用

- [智能恒温器](#)
- [HVAC 网关](#)
- [入侵控制面板](#)



咨询我们的 E2E 专家

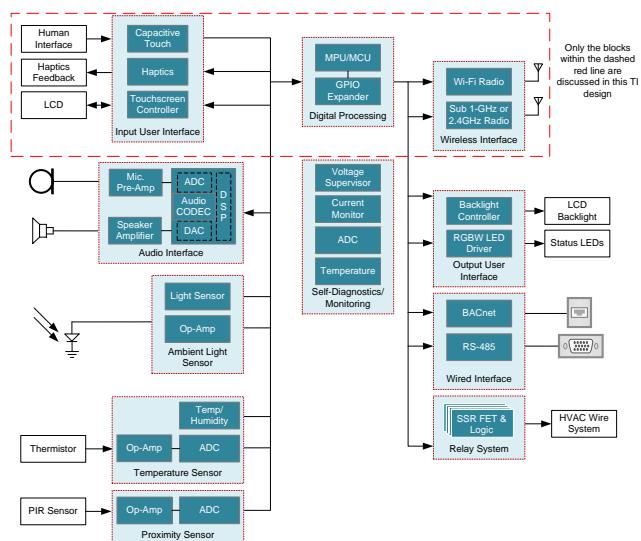

该 TI 参考设计末尾的重要声明表述了授权使用、知识产权问题和其他重要的免责声明和信息。

1 System Description

Network connectivity in the home and in businesses has created the opportunity for all manner of “smart” devices to communicate not only with the Internet, but with each other. A great example of this is the smart thermostat. Increased connectivity has allowed for some very useful features, such as remote programmability through mobile apps, and communication with remote sensors throughout the building. Programmable thermostats are not new, but the ability to program them using an efficient HMI, such as a touch screen or voice commands, rather than with a handful of buttons and arrow icons, has made the experience much easier. Modern thermostats built with more advanced microprocessors also allow for complex customization and the ability to learn the habits of a building’s occupants to conserve energy.

The Sitara™ AM335x processor’s easy-to-use programming tools and portfolio of on-chip capabilities give designers a head start on Smart Thermostat development projects.

The TIDEP-01005 reference design is a quick starting point for customers who want to design a Smart Thermostat HMI module. The solution is also applicable to similar end equipment, such as HVAC Gateway systems and Intrusion Control Panel systems.

The TI AM335x high-performance processors are based on the Arm® Cortex®-A8 core (see [图 1](#)). These enhanced processors have rich peripheral set and an advanced display capability, including 2-D and 3-D acceleration to help customers design cost-effective Smart Thermostat HMIs. The devices support high-level operating systems (HLOS) such as Linux, which is available free of charge from TI. The AM335x family offers a performance upgrade to systems that are based on lower performance MCUs or processors, and provides enhanced I/O capabilities.



图 1. Sitara™ AM335x Chip

The AM335x supports 24-bit, liquid-crystal display (LCD) controllers with resolutions up to 2048 × 2048, which provides scalability from low- to mid-end displays.

The Qt framework is used to develop the GUI for the Smart Thermostat HMI application software. Qt is a cross-platform application framework written in C++. Learn more about Qt at <https://www.qt.io>.

2 System Overview

2.1 Block Diagram

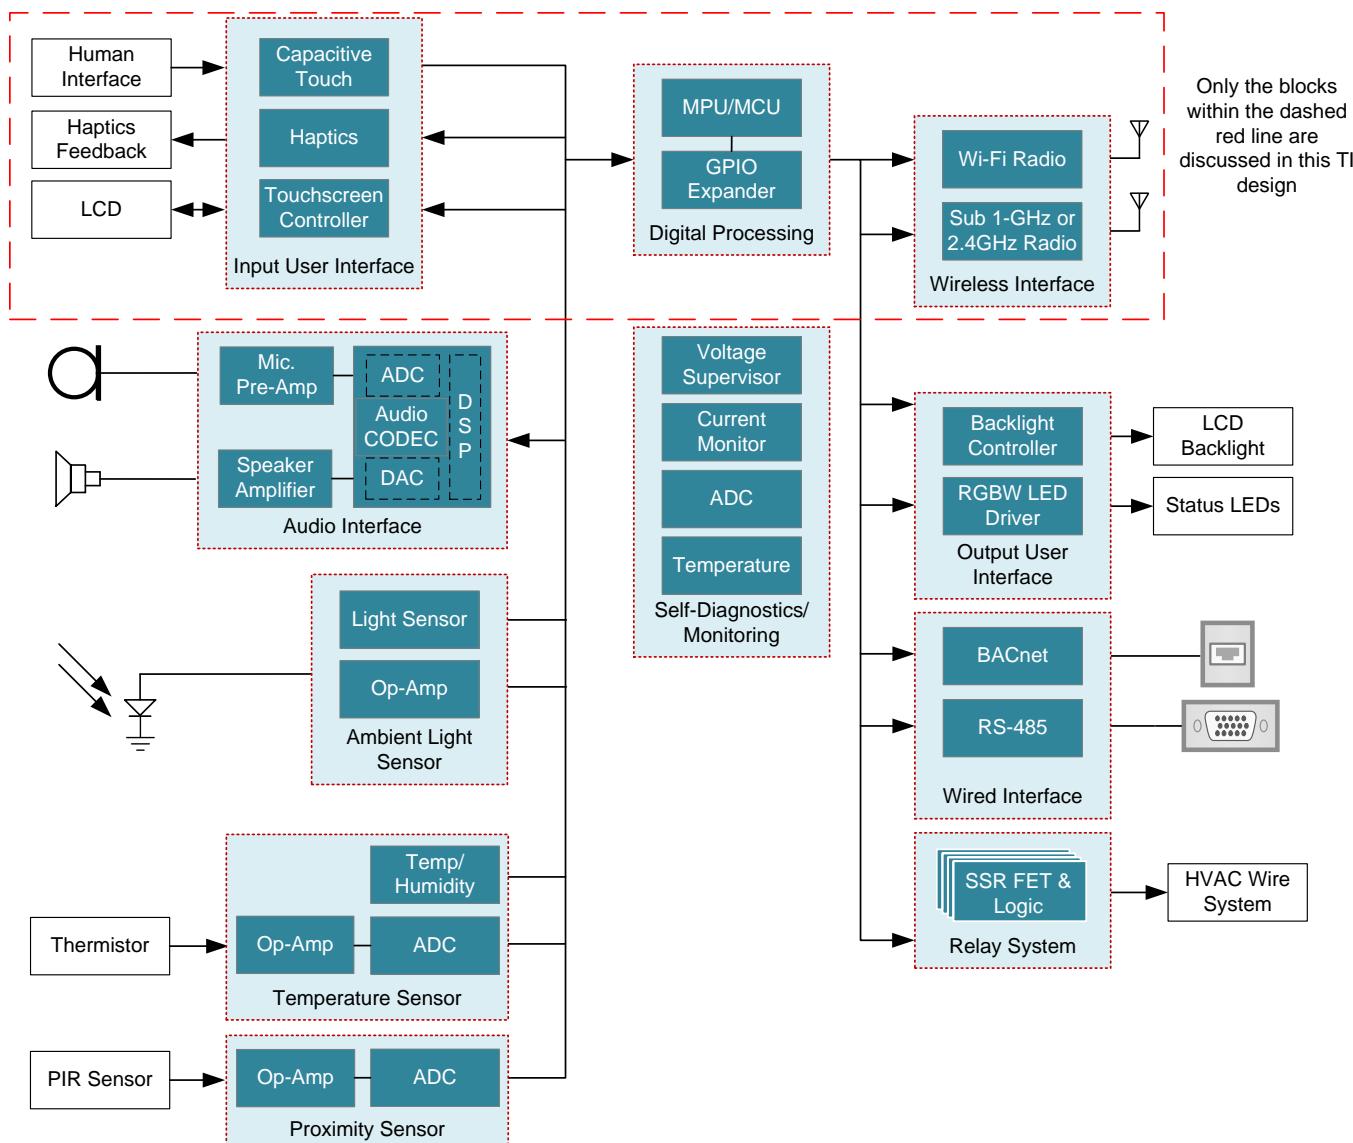


图 2. Smart Thermostat HMI Block Diagram


2.2 Highlighted Products

2.2.1 AM335x

The AM335x processors, based on the Arm Cortex-A8 core, are enhanced with image, graphics processing, peripherals, and industrial interface options, such as EtherCAT® and PROFIBUS®.

These devices support HLOS, such as Linux. The AM335x processors contain the subsystems in [图 3](#): the microprocessor unit (MPU) subsystem, which is based on the Arm Cortex-A8 core, and the PowerVR SGX530™, which provides 3-D graphics acceleration to support display and gaming effects.

The Programmable Real-Time Unit Subsystem and Industrial Communication SubSystem (PRU-ICSS) is separate from the Arm core and allows independent operation and clocking for greater efficiency and flexibility. The PRU-ICSS enables additional peripheral interfaces and real-time protocols, such as EtherCAT, PROFINET®, EtherNet/IP™, PROFIBUS, Ethernet Powerlink™, Sercos™, and others.

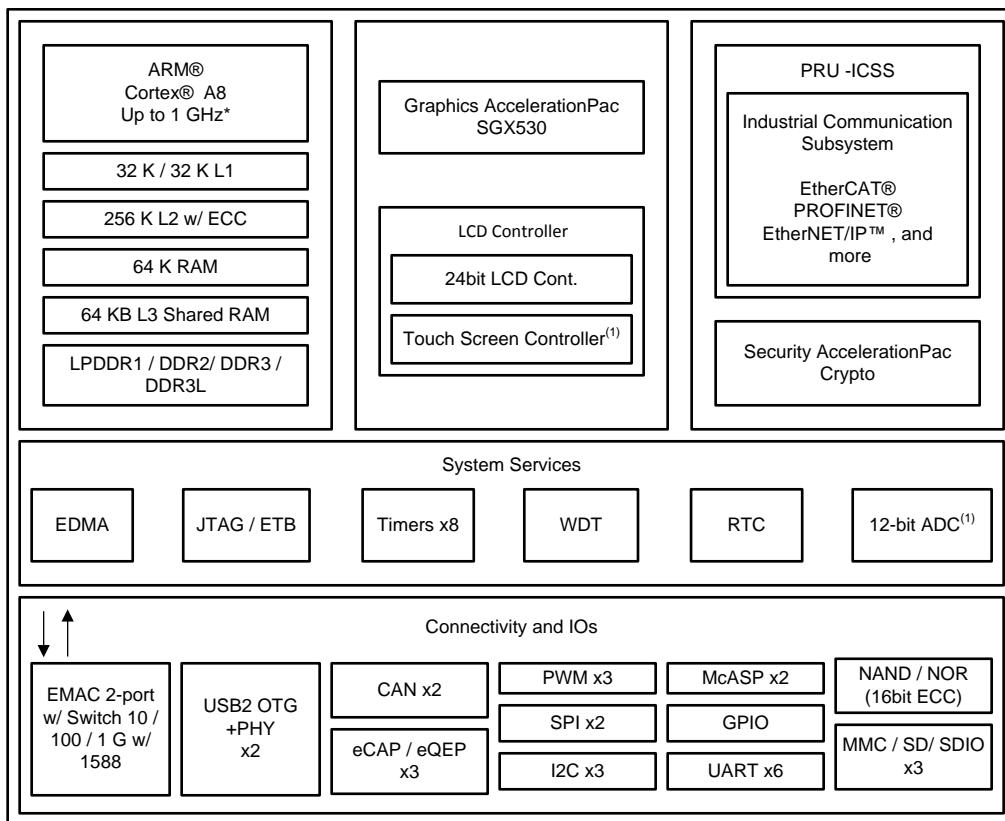

00 MHz / 1 GHz only available on 15 x 15 package. 13 x 13 support up to 600 MHz. Use of TSC will limit available ADC channels.

Copyright © 2017, Texas Instruments Incorporated

图 3. AM335x Block Diagram

Additionally, the programmable nature of the PRU-ICSS, along with its access to pins, events, and all system-on-chip (SoC) resources, provides flexibility in implementing fast, real-time responses, specialized data handling operations, custom peripheral interfaces, and in offloading tasks from the other processor cores of an SoC.

3 Hardware, Software Requirements, and Demonstration

3.1 Required Hardware and Software

3.1.1 Hardware

The AM335x Starter Kit EVM is required to run the Smart Thermostat HMI demonstration application. The AM335x Starter EVM is a stand-alone test, development, and evaluation module system that enables developers to write software and develop hardware around an AM335x processor subsystem.

See the [AM335x Starter Kit Hardware User's Guide](#) for instructions on getting started and details on the hardware architecture of the AM335x Starter Kit EVM.

3.1.2 Software

The AM335x Processor SDK for Linux (Processor-SDK-Linux) provides a fundamental software platform for development, deployment, and execution of Linux-based applications. The Smart Thermostat HMI demonstration application source code is integrated in the Processor-SDK-Linux. The example application can be played through the Matrix GUI application launcher. More information on Qt application development using Processor-SDK-Linux can be found in [Qt Training: Multipage Resizable Graphical User Interfaces Containing Media](#) and [Sitara Linux Training: Hands on with QT](#).

The Processor-SDK Linux package contains a software user's guide and additional documentation for setting up and running the Smart Thermostat HMI demonstration application. Download the package from [www.ti.com/tool/PROCESSOR-SDK-AM335X](#).

For the purposes of this design guide, use a Linux host machine for the following instructions. With the required hardware, program the SD card with the Linux processor SDK image using the following steps:

1. Download the [SDK installer ti-processor-sdk-am335x-evm-xx.xx.xx.xx-Linux-x86-Install.bin](#) from TI.com (where xx.xx.xx.xx is the version number of the latest Linux processor SDK).
2. Create the SD card with default images using the [SDK Create SD Card Script](#) or see the user's guide.
3. Boot the Linux kernel and file system using the created SD card.
4. The Smart Thermostat demo is found in the Matrix GUI application launcher, as described in the next section.

3.2 Demonstration

3.2.1 Demonstration Setup

This subsection provides details of the test setup with the required hardware and software to run the TI Smart Thermostat HMI software application.

1. Insert the micro SD card created in [节 3.1.2](#) in the location shown in [图 4](#).
2. Insert the 5-V power supply and press the power button shown in [图 4](#).

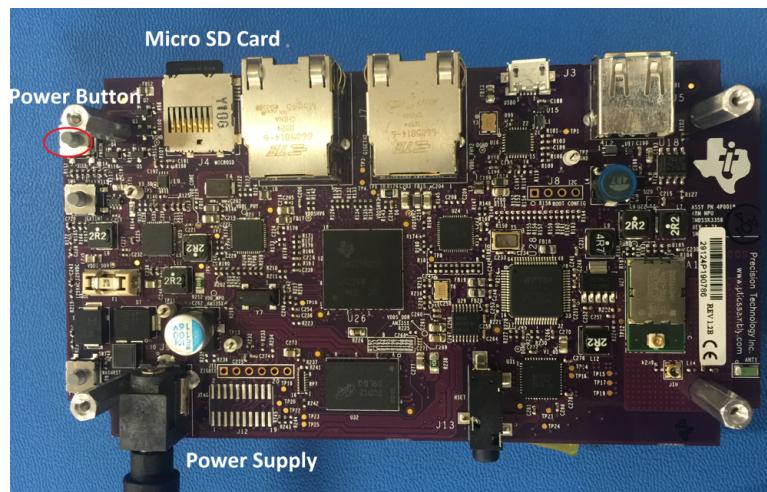


图 4. AM335x Starter Kit Setup (LCD Face Down)

3. The board boots up, the Matrix GUI application launches, and the interface shows on the LCD screen (see [图 5](#)).



图 5. AM335x Starter Kit Setup (LCD Face Up)

3.2.2 Demonstration Procedure

The demonstration procedure is as follows:

1. Click the arrow icon to go to the second page of the Matrix GUI, as shown in [图 6](#). Click on the Qt5 icon to navigate to the Qt5-based demonstrations, including the Smart Thermostat HMI.



图 6. AM335x Matrix GUI Page 2

2. [图 7](#) shows the Qt5 Submenu, which is the next screen that appears. Click on the *Thermostat Demo* icon.



图 7. Qt5 Submenu

3. 图 8 appears on the screen. Click the *Run* button to launch the Smart Thermostat HMI demonstration GUI.

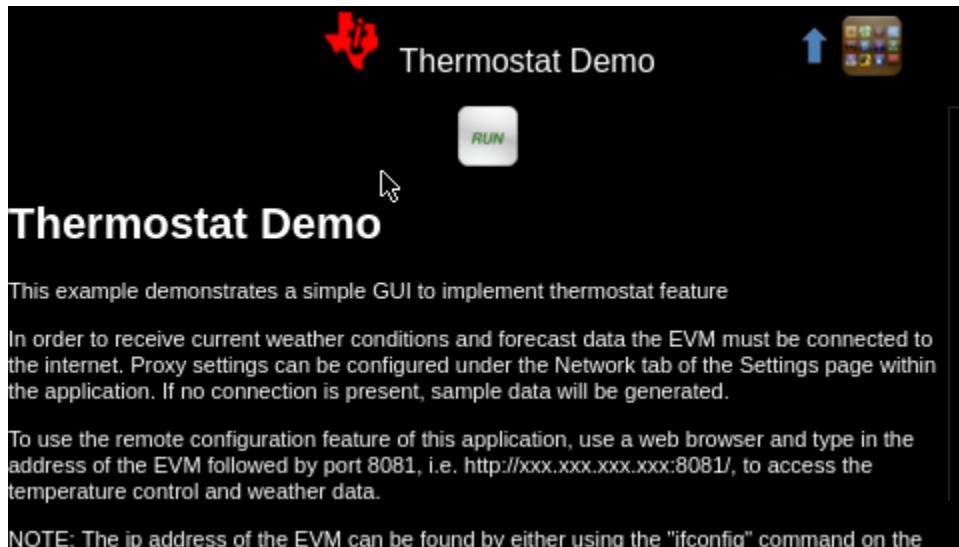


图 8. Smart Thermostat HMI Description and Run Screen

4. The Smart Thermostat demonstration GUI launches and the *main* screen shows (see 图 9).
- The current temperature, weather, and the three-day weather forecast of the selected city
 - The room temperature and temperature adjustment buttons
 - Three control buttons on the upper left enter the corresponding control screen
 - Setting icon: Various Configuration Options
 - Schedule icon: Weekly Schedule
 - Airplane icon: Energy Saving Mode
 - The purple *Exit* button on the upper right exits out of the demonstration and returns to the Matrix GUI in the previous 图 5.

注： The *Exit* button on this screen is the only way to exit out of the demonstration GUI and return to the Matrix GUI.



图 9. Smart Thermostat Demo GUI: Main Screen

5. The Airplane icon in 图 9 leads to the energy saving mode screen shown in 图 10.
 - The return icon in the upper-right corner directs the user back to the Home screen in 图 5.

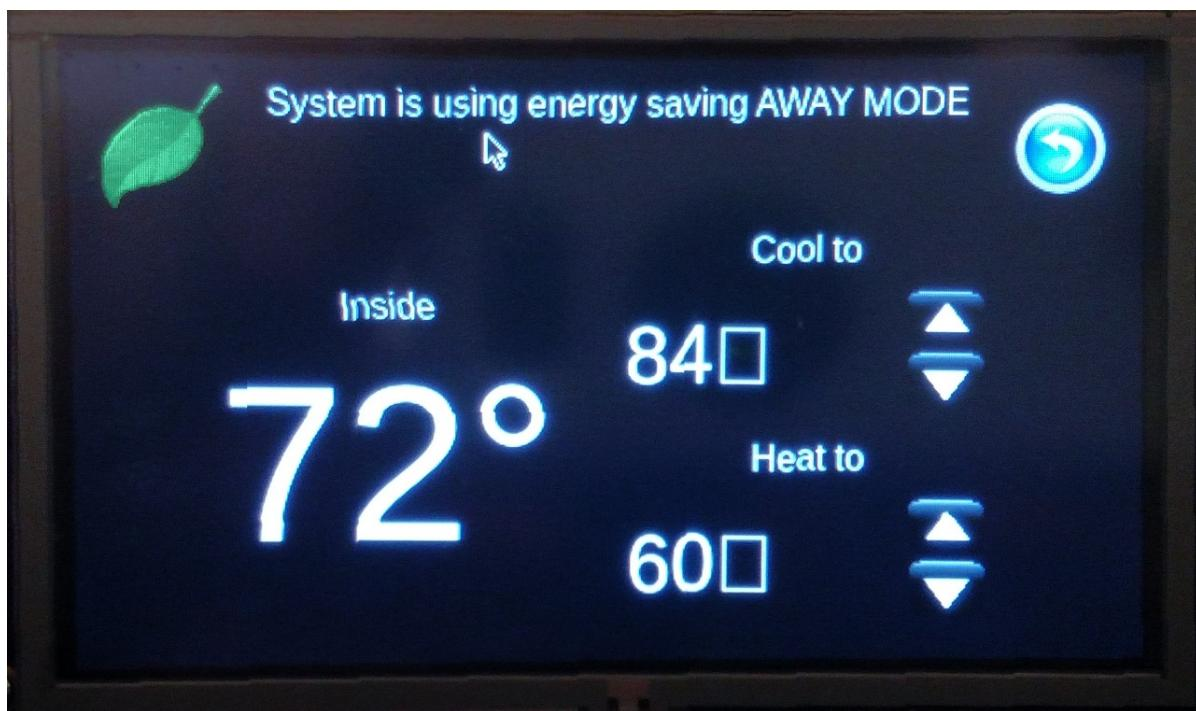


图 10. Smart Thermostat Demo GUI: Energy Saving Screen

6. The Scheduler icon in 图 9 leads to the weekly schedule screen shown in 图 11.

- The return icon in the upper-right corner directs the user back to the Home screen in 图 5.

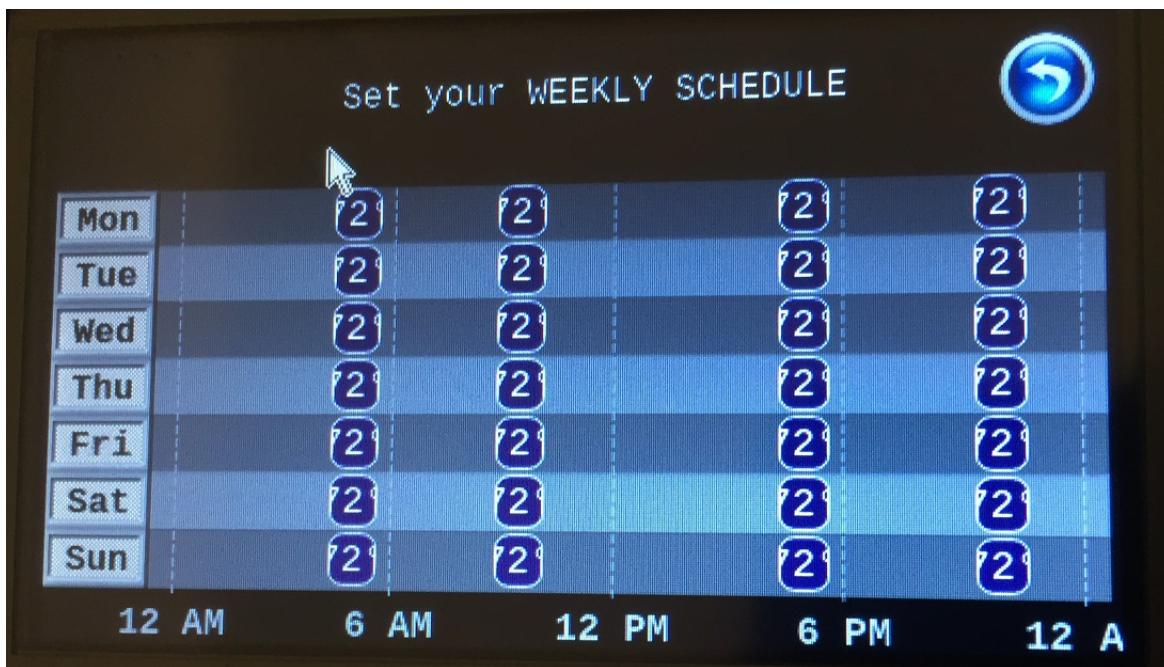


图 11. Smart Thermostat Demo GUI: Weekly Schedule Screen

7. The Click to Settings icon in 图 9 leads to the city select screen shown in 图 12.

- Use the pull-down menu to select the desired city.
- The setting options (General/Format/Network) appear on the left.
- The return icon in the upper-right corner directs the user back to the Home screen in 图 5.

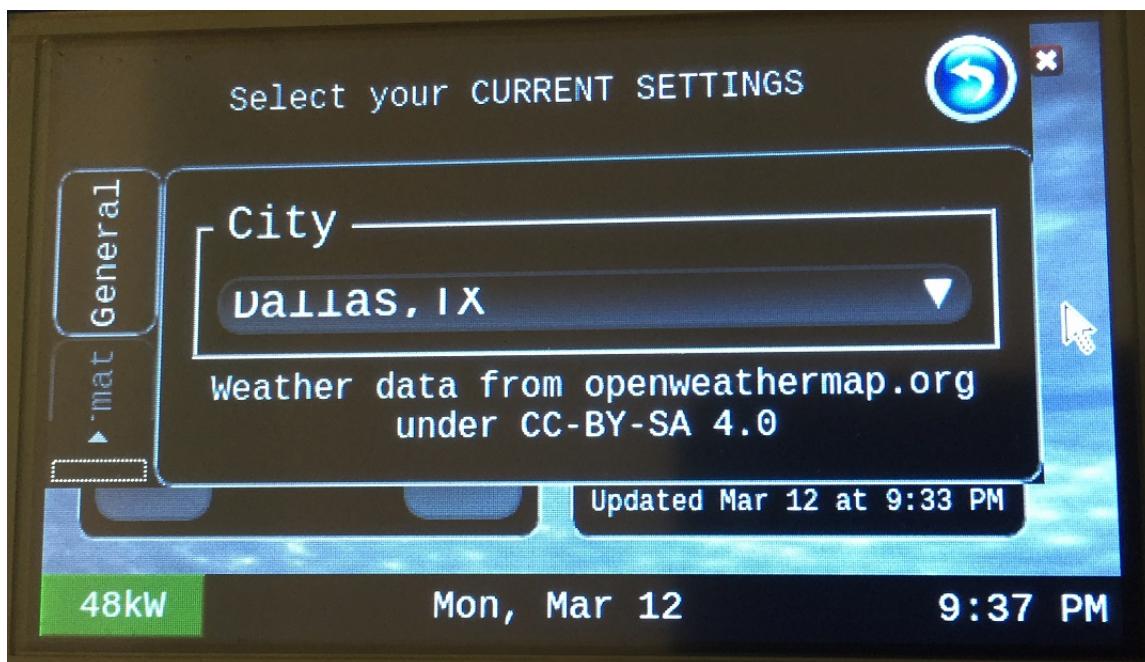


图 12. Smart Thermostat Demo GUI: City Select Screen

8. The Format option in 图 12 leads to the temperature and time format select screen shown in 图 13.

- Click the desired format to select.
- The setting options (General/Format/Network) appear on the left.
- The return icon on the upper-right corner directs the user back to the Home screen in 图 5.

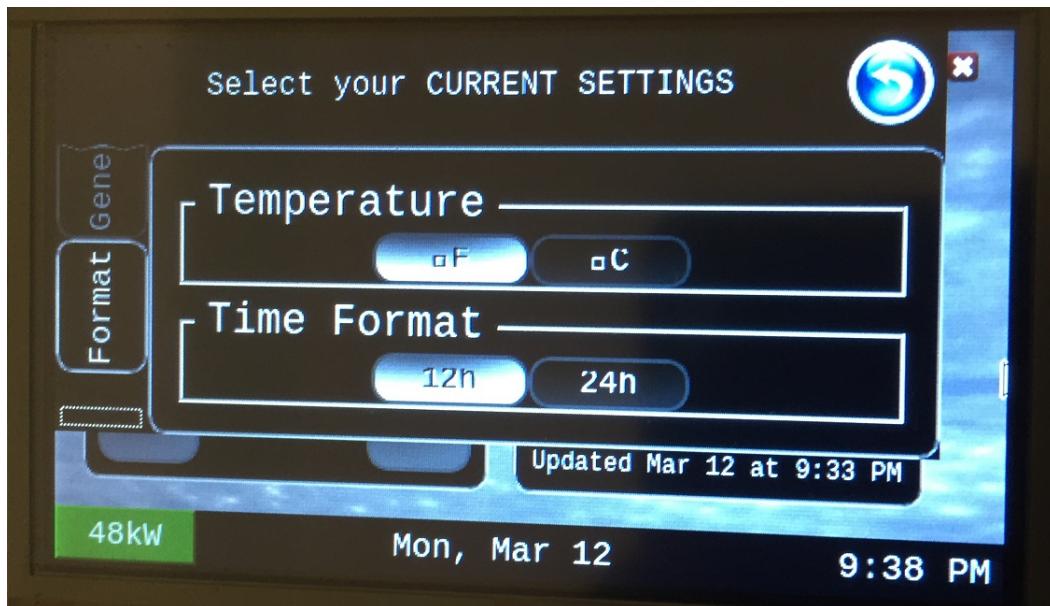


图 13. Smart Thermostat Demo GUI: Temperature and Time Format Setting Screen

9. The Network option in 图 12 leads to the proxy settings screen shown in 图 14.

- Enter the proxy host and port number
- The setting options (General/Format/Network) appear on the left
- The return icon in the upper-right corner directs the user back to the Home screen in 图 5.

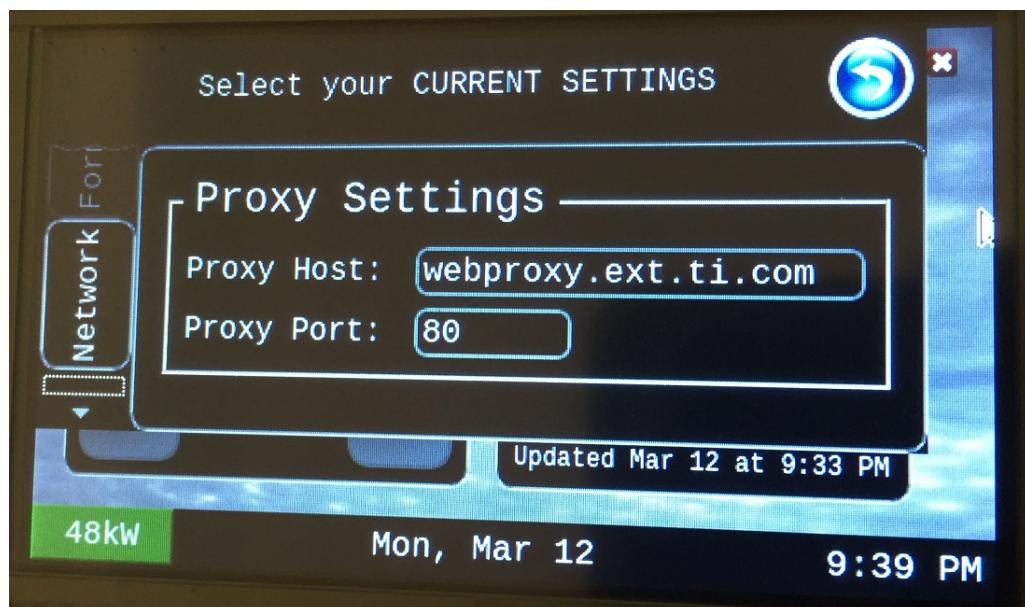


图 14. Smart Thermostat Demo GUI: Network Proxy Setting Screen

4 Design Files

To download the hardware design files for the AM335x Starter Kit, see the design files at [TMDSSK3358](#).

5 Software Files

Download the Processor SDK Linux for AM335x from the [AM335x software product page](#).

6 Related Documentation

1. Texas Instruments, [AM335x Starter Kit Hardware User's Guide](#), AM335x Wiki Page
2. Texas Instruments, [Qt Training: Multipage Resizable Graphical User Interfaces containing Media](#), Application Report (SPRACB2)
3. Texas Instruments, [Sitara Linux Training: Hands on with QT](#), Wiki Page
4. Texas Instruments, [Processor SDK Linux Software Developer's Guide](#), Wiki Page
5. Texas Instruments, [Processor Linux SDK Graphics and Display](#), Wiki Page

6.1 商标

Sitara is a trademark of Texas Instruments.

EtherCAT is a registered trademark of Beckhoff Automation GmbH, Germany.

Ethernet Powerlink is a trademark of Bernecker + Rainer Industrie-ElektronikGes.m.b.H..

PowerVR SGX530 is a trademark of Imagination Technologies Limited.

EtherNet/IP is a trademark of Ovda, Inc..

PROFIBUS, PROFINET are registered trademarks of PROFIBUS and PROFINET International (PI).

Sercos is a trademark of Sercos International.

All other trademarks are the property of their respective owners.

7 Terminology

EVM— Evaluation module

GUI— Graphical user interface

HLOS— High-level operating systems

HMI— Human machine interface

PRU-ICSS— Programmable Real-Time Unit Subsystem and Industrial Communication SubSystem

SDK— Software development kit

SoC— System-on-chip

UART— Universal asynchronous transmitter/receiver

8 About the Author

ERIC RUEI is part of the Software Design team in the Catalog Processors BU. He has been with TI for more than 17 years and has worked on VoIP, Keystone and Sitara platforms. He has been a key player for various projects such as VoIP High-Density Solution and the PRU_based network and security offload engine present on Keystone SoCs. He serves as the lead and domain expert for the Graphics and Display subsystem on Sitara devices now. Eric earned his Master of Science in Electrical Engineering from UMD, College Park, MD

有关 TI 设计信息和资源的重要通知

德州仪器 (TI) 公司提供的技术、应用或其他设计建议、服务或信息，包括但不限于与评估模块有关的参考设计和材料（总称“TI 资源”），旨在帮助设计人员开发整合了 TI 产品的应用；如果您（个人，或如果是代表贵公司，则为贵公司）以任何方式下载、访问或使用了任何特定的 TI 资源，即表示贵方同意仅为该等目标，按照本通知的条款进行使用。

TI 所提供的 TI 资源，并未扩大或以其他方式修改 TI 对 TI 产品的公开适用的质保及质保免责声明；也未导致 TI 承担任何额外的义务或责任。TI 有权对其 TI 资源进行纠正、增强、改进和其他修改。

您理解并同意，在设计应用时应自行实施独立的分析、评价和判断，且应全权负责并确保应用的安全性，以及您的应用（包括应用中使用的所有 TI 产品）应符合所有适用的法律法规及其他相关要求。你就您的应用声明，您具备制订和实施下列保障措施所需的一切必要专业知识，能够（1）预见故障的危险后果，（2）监视故障及其后果，以及（3）降低可能导致危险的故障几率并采取适当措施。您同意，在使用或分发包含 TI 产品的任何应用前，您将彻底测试该等应用和该等应用所用 TI 产品的功能而设计。除特定 TI 资源的公开文档中明确列出的测试外，TI 未进行任何其他测试。

您只有在为开发包含该等 TI 资源所列 TI 产品的应用时，才被授权使用、复制和修改任何相关单项 TI 资源。但并未依据禁止反言原则或其他法理授予您任何 TI 知识产权的任何其他明示或默示的许可，也未授予您 TI 或第三方的任何技术或知识产权的许可，该等产权包括但不限于任何专利权、版权、屏蔽作品权或与使用 TI 产品或服务的任何整合、机器制作、流程相关的其他知识产权。涉及或参考了第三方产品或服务的信息不构成使用此类产品或服务的许可或与其相关的保证或认可。使用 TI 资源可能需要您向第三方获得对该等第三方专利或其他知识产权的许可。

TI 资源系“按原样”提供。TI 兹免除对 TI 资源及其使用作出所有其他明确或默认的保证或陈述，包括但不限于对准确性或完整性、产权保证、无屡发故障保证，以及适销性、适合特定用途和不侵犯任何第三方知识产权的任何默认保证。

TI 不负责任何申索，包括但不限于因组合产品所致或与之有关的申索，也不为您辩护或赔偿，即使该等产品组合已列于 TI 资源或其他地方。对因 TI 资源或其使用引起或与之有关的任何实际的、直接的、特殊的、附带的、间接的、惩罚性的、偶发的、从属或惩戒性损害赔偿，不管 TI 是否获悉可能会产生上述损害赔偿，TI 概不负责。

您同意向 TI 及其代表全额赔偿因您不遵守本通知条款和条件而引起的任何损害、费用、损失和/或责任。

本通知适用于 TI 资源。另有其他条款适用于某些类型的材料、TI 产品和服务的使用和采购。这些条款包括但不限于适用于 TI 的半导体产品 (<http://www.ti.com/sc/docs/stdterms.htm>)、**评估模块** 和样品 (<http://www.ti.com/sc/docs/samptersms.htm>) 的标准条款。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2018 德州仪器半导体技术（上海）有限公司